

**HEAVY DUTY
TRACTOR RANGE**
« FOR YOUR FIELD »

WT75
2WD



HIGH TORQUE
ENGINE

12F+12R SYNCHROMESH
TRANSMISSION

HEAVY LIFT
CAPACITY

TWIN PROJECTOR
HEADLAMPS

INTEGRATED SAFETY
HVAC CABIN (OPTIONAL)

HEAVY DUTY TRACTOR RANGE FOR YOUR FIELD

WT75 2WD

FEATURES	Sonalika WT 75 (12+12) 2WD
ENGINE 	
Engine Type	ITL Engine (4100FLT)
HP Category	75
No. of Cylinders	4
Aspiration	Turbo Charged
Cubic Capacity (cc)	3707
Rated RPM	2200
Air cleaner	Dry Air Cleaner
Cold Start	Standard
Max Torque (nm) (+/- 5%)	278 @ 1200±100
Exhaust	Updraft/Downdraft(optional)
Muffler	Under-hood
TRANSMISSION 	
Drive	2WD/4WD (Optional)
Clutch	Double Clutch
Gearbox	12F+12R
Transmission	Synchronmesh
SPEED (FORWARD) 	
Maximum Speed (Km/Hr)	32.91 @ 2200 erpm
Minimum Speed (Km/Hr)	1.53 @ 2200 erpm
BRAKES 	
Brakes	Oil Immersed Brakes
Type of actuation	Mechanical
Parking Brake	Mechanical, Hand Operated
DIFFERENTIAL LOCK 	
Differential lock	Mechanical, Foot Operated


FEATURES	Sonalika WT 75 (12+12) 2WD
PTO 	
PTO Type	Independent
PTO (rpm)	540/540 (Standard) 540/1000 (Optional)
PTO (Actuation)	Mechanical
STEERING 	
Steering	Power
ELECTRICAL 	
Battery	12V 110 Ah
Alternator	12V, 36 AMP (90 Amp)
Seven pin trailer socket	Output 12V
HYDRAULICS 	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	2500Kg (3000kg Optional)
Auxiliary Hydraulic circuit	2SA/2DA
Lift Rods	Standard
SAFETY SWITCH 	
Clutch Safety Switch	Standard
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
TURNING RADIUS 	
Without Brakes (m)	5.52 (w/o brake)
TYRE 	
Front	7.50*16
Rear	16.9*30
DIMENSION & WEIGHT(+/-5%) 	
Weight(kg)	3410
Wheel Base (mm)	2340
Total Length (mm)	4083-4280
Total Width (mm)	2000-2070
Height (mm) up to ROPS	2782 (ROPS)
Min. Ground Clearance (mm)	321
Front Track (mm)	1380
Rear Track (mm)	1508

SONALIKA FAMAG



FEATURES	Sonalika WT 75 (12+12) 2WD
OTHERS 	
Fuel Indicator gauge	Standard
Front Tow Hook	Standard, inbuilt in front weight
Front & Rear Weights with Std. Ballast	Front - 30*2+25*4 Kg Optional Weights Rear - 34*1 Kg Option 1 72 + 6*31 Kg 72 + 8*31 Kg
Trailer Hitch	Swinging Draw Bar with Rotating To Hook
Roll Over Protection	Standard
OPTIONAL FEATURES 	
Cabin	HVAC/Heater (Optional)
Front Mudguard	Optional
Platform	Plus (Flat Floor)
Optional Tyre Size	1) Front Tyre: 12.4x24 Rear Tyre: 18.4x30 (R-2) 2) Front Tyre: 12.4x24 Rear Tyre: 18.4x30 3) Front Tyre: 280/85R24 Rear Tyre: 420/85R30 4) Front Tyre: 12.4x24 Rear Tyre: 13.6x38 5) Front Tyre: 12.4x24 Rear Tyre: 340/85R38 6) Front Tyre: 7.5x16 Rear Tyre: 420/85R30 7) Front Tyre: 7.5x16 Rear Tyre: 16.9x30 8) Front Tyre: 7.5x16 Rear Tyre: 13.6x38 9) Front Tyre: 320/85R24 Rear Tyre: 460/85R30
Front and Rear Weights	Front 25x2 Kg Rear: 2x34 Kg on Each Wheel
Carraro Transmission	Creeper speeds (Carraro Transmission)

*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE. Please correlate with latest updates, accessories shown may not be part of standard product.

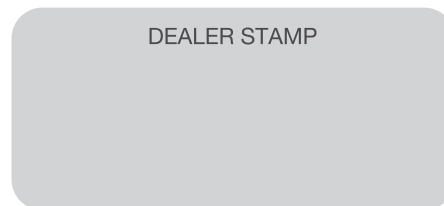

SONALIKA FAMAG S.P.A

Address: Industrial Area, N7, Sidi Bel Abbès, Algeria, Phone: +213(0)48 70 35 03

URL: <https://sonalika-famag.com>